

Kombi-9 Series

Pressure Independent Integrated Balancing Control Valve

Product Specifications



Application

Honeywell Kombi-9 is designed for precise temperature control of terminal air-conditioning equipment in the HVAC system. It can maintain the flow regardless of variations in system differential pressure. With the valve position feedback the Building Automation System can always operate in the most energy-saving mode.

Features

- Integrated functions as linear temperature control, pressure independent and electric regulating into one valve
- Output the valve position signal to BAS for system variable differential pressure control of variable flow water system, ensure HVAC water system can always operate in the most energy-saving mode
- High control accuracy, strong anti-interference capacity
- Wide fluctuating range of pressure difference for the system
- Simple calculation in designing the pipeline system
- Easy installation
- Extremely convenient for commissioning at site

Components of ML-SBU Series Super Electric Actuator

- Built-in common terminal equipment thermal output features database for high-precise linear temperature control of the terminal equipment
- Built-in pressure-independent characteristics database ensures the pressure-independent temperature and flow control
- All temperature and flow can be automatically regulated without any human interference
- Size of control valve can be set directly
- Stroke self-adaption function
- Max. flow can be preset easily according to the requirements of the terminal equipment
- Display of max. set flow
- Extremely low energy consumption

Control valve

- V5011P Series control valve for DN25-DN50
- V5328A Series control valve for DN65-DN80
- V5088A Series control valve for DN100-DN150
- V5GV series control valves for DN65~DN150
- Bronze valve body (DN25~DN50) resists corrosion and long service life
- Stainless steel plug and the metallic sealing ensures basically no leakage of the valve

Major Technical Parameters

Size range:	DN25~DN150	Valve rated pressure:	PN16
Flow control accuracy:	±5%	Connection of valve:	DN25~DN50: Female screw BSPT DN65~DN150: Flange (ISO7005-2)
Max. flow set range:	60%~100%*Qr	Valve body Material:	DN25~DN50: Bronze DN65~DN150: Control valve cast iron GG25
Max. close-off pressure:	10Bar/DN25, 7Bar/DN32, 4.6Bar/DN40, 2.6Bar/DN50 10Bar/DN65~DN150	Media:	Water, glycol solution
Operating Pressure		Media temperature:	-5°C~120°C
Difference Range:	30~250kPa	Operating ambient temperature:	0 ~ 65°C
Input control signal:	0/2~10VDC 0/4~20mA	Atmosphere:	Non-corrosive, non-explosive
Feedback signal :	2~10VDC		
Supply voltage:	24VAC(+15%,-10%),50/60Hz		
Electric connection:	1 m operating power cable		


Selection

Size	Qr(m ³ /h)*	Kvs theor.**	Interface	Valve Assembly OS#	Actuator & Sensor OS#	Power consumption (VA)		
DN25	3.5	8.7	Threaded	V5011P1004- K9	ML7420A8088-SBU	6(Operation) 3.5(Standby)		
DN32	6.0	15.0		V5011P1012- K9				
DN40	9.6	24.0		V5011P1020- K9				
DN50	16.1	40.2		V5011P1038- K9				
DN65	26.0	63.0		V5328A1179- K9				
DN65	26.0	63.0	Flanged	V5GV2W065F- K9			ML7421B8012-SBU	12(Operation) 2.6(Standby)
DN80	40.0	100.0		V5328A1187- K9				
DN80	40.0	100.0		V5GV2W080F-K9				
DN100	63.0	157.5		V5088A1005- K9				
DN100	63.0	160.0		V5GV2W100F- K9				
DN125	103.0	250.0		V5088A1013- K9				
DN125	103.0	250.0		V5GV2W125F- K9				
DN150	137.0	342.5		V5088A1021- K9				
DN150	137.0	360.0	V5GV2W150F- K9					

*: Qr is the maximum flow rate under pressure independent control mode

** : Theoretical Kvs value for pressure drop calculation


Dimension

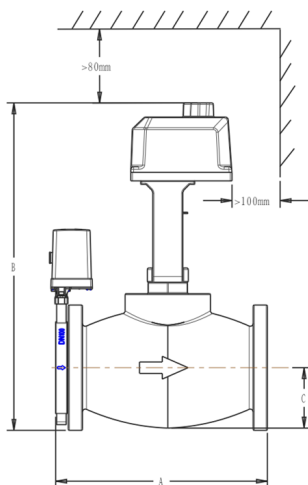

OS#	Size	A(mm)	B(mm)	C(mm)	Weight (kg)
V5011P1004- K9	DN25	180	348.5	66.5	3.8
V5011P1012- K9	DN32	184	354.5	72.5	4.2
V5011P1020- K9	DN40	191	366	77	5.2
V5011P1038- K9	DN50	202	372.5	83.5	6.2
V5328A1179- K9	DN65	312	446.5	92.5	18.2
V5GV2W065F- K9	DN65	311	539	93	21.4
V5328A1187- K9	DN80	332	456	100	26.7
V5GV2W080F- K9	DN80	331	558.5	100	28.7
V5088A1005- K9	DN100	372	617	110	50
V5GV2W100F- K9	DN100	371	592	110	38.9
V5088A1013- K9	DN125	422	670	125	60.5
V5GV2W125F- K9	DN125	421	625	125	53.7
V5088A1021- K9	DN150	502	687.5	142.5	80.7
V5GV2W150F- K9	DN150	501	665	143	70.8

Flow Characteristics


The Kombi-9 can be configured to work under equal percentage flow curve or linear flow curve. The input control signal can be 0~10V, 2~10V, 0~20mA or 4~20mA.

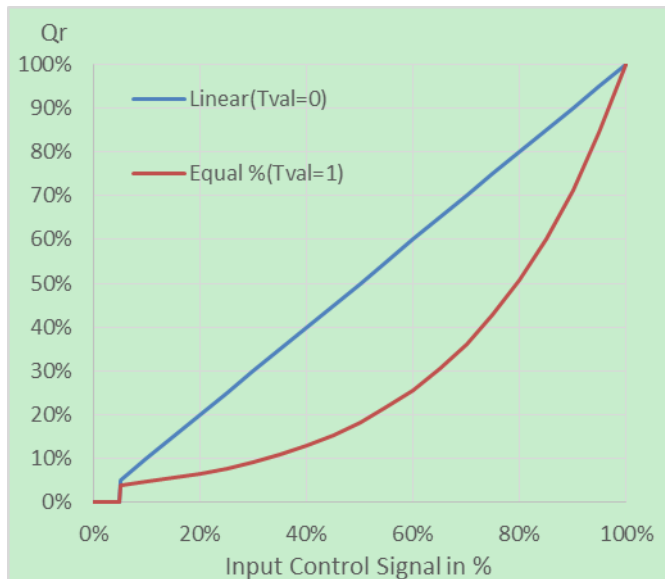

When control signal is less than 5% the valve will be fully-closed.

Pressure Independent Features

The Kombi-9 can maintain its flow according to input control signal, regardless of the pressure change of the system.

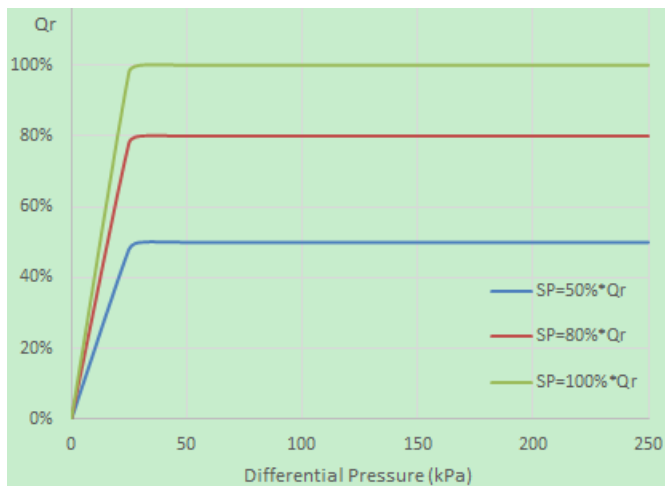


Feedback

Kombi-9 provides a 2~10VDC feedback to the Building Automation System as valve position. The higher the feedback voltage the greater the system differential pressure, providing the input control signal remains unchanged. The BAS can reduce pump output and save energy by keeping the most unfavorable loop in full-open state.

Parameter Display and Setting

The Kombi-9 has a control unit with LCD, switch and buttons to set and display parameters.

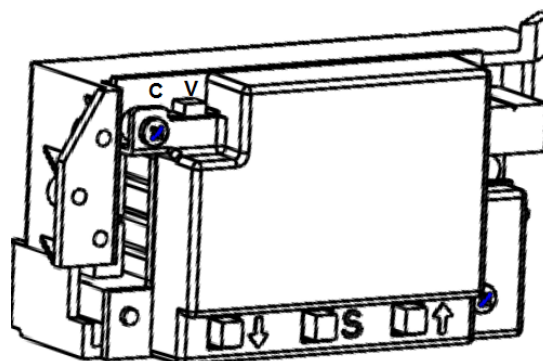

The switch in the upper left corner of the LCD is to select input control signal type: C for 0/4~20mA and V for 0/2~10V. Furthermore, selection should be done with buttons to set the minimum control signal (0 or higher).

The LCD and buttons can display and set parameters.

Parameters are displayed on several pages:

Parameter	Description
DN	Valve size: DN25, DN32, DN40, DN50, DN65, DN80, DN100, DN125, DN150. Default DN50
Si	Input control signal type: 0~10V, 2~10V, 0~20mA, 4~20mA. Default 0~10V
T	Adjustable max. flow rate: 60%~100%*Qr. Default 100%*Qr
P	Kp of PID control: 0~500. Default 50.
I	Ki of PID control: 0~500. Default 400.
D	Kd of PID control: 0~500. Default 0.
Rev	Actuator direction: 0 Direct, 1 Reverse. Default Direct.
Tval	Flow curve: 0 Linear, 1 Equal percentage. Default Equal percentage.
Pas	Bypass pressure independent control mode. 0 no bypass, 1 bypass. Default bypass.
De-code	Password to enter parameter setting mode. Default 68.
Qr	Max. flow rate under pressure independent control mode.
Kvs	Theoretical Kvs value for pressure drop calculation.
Qs	T*Qr
Pmin	Min. operating differential pressure.
Pmax	Max. operating differential pressure.
Vin	Input control signal in Volt.
Vout	Output control signal (Volt) to actuator.